


BUSSOLE CONICHE TAPER BUSHES

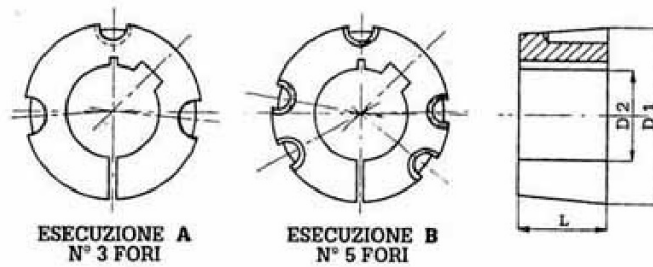

★ Serie metrica: Alesaggi in mm. classe ISO E 8 - Cave DIN 6885

TIPO BUSSOLA	ESECU- ZIONE	L	D 1	Solo foro minimale D2 H8	★ Foro D 2	Viti B.S.W.	Coppia di serraggio in N/m
1008	A	22	35,0	8	10 - 12 - 14 - 16 - 18 - 19 - 20 - 22 - 24 - 25	1/4" x 1/2"	5,6
1108	A	22	38,0	12	12 - 14 - 16 - 19 - 20 - 24 - 25	1/4" x 1/2"	5,6
1210	A	25	47,5	12	12 - 14 - 16 - 18 - 19 - 20 - 24 - 25 - 28 - 30 - 32	3/8" x 5/8"	19,6
1215	A	38	47,5	12	14 - 19 - 20 - 24 - 25 - 28	3/8" x 5/8"	19,6
1610	A	25	57,0	12	14 - 16 - 18 - 19 - 20 - 24 - 25 - 28 - 30 - 32 - 35 - 38 - 40 - 42	3/8" x 5/8"	19,6
1615	A	38	57,0	12	14 - 19 - 20 - 22 - 24 - 25 - 28 - 30 - 32 - 35 - 38 - 40	3/8" x 5/8"	19,6
2012	A	32	70,0	16	19 - 20 - 24 - 25 - 28 - 30 - 32 - 35 - 38 - 40 - 42 - 45 - 48 - 50	7/16" x 7/8"	30,4
2517	A	45	85,5	15	19 - 20 - 24 - 25 - 28 - 30 - 32 - 35 - 38 - 40 - 42 - 45 - 48 - 50 - 55 - 60 - 65	1/2" x 1"	48
3020	A	51	108,0	20	28 - 30 - 32 - 35 - 38 - 40 - 42 - 45 - 48 - 50 - 55 - 60 - 65 - 70 - 75	5/8" x 1" 1/4	90
3030	A	76	108,0	30	38 - 42 - 45 - 48 - 50 - 55 - 60	5/8" x 1" 1/2	90
3525	B	65	127,0	30	38 - 40 - 42 - 45 - 48 - 50 - 55 - 60 - 65 - 70 - 75 - 80	1/2" x 1" 1/2	113
3535	B	89	127,0	30	40 - 42 - 45 - 48 - 50 - 55 - 60 - 65 - 70 - 75 - 80 - 85 - 90	1/2" x 1" 1/2	113
4030	B	76	146,0	30	40 - 42 - 45 - 48 - 50 - 55 - 60 - 65 - 70 - 75 - 80 - 90	5/8" x 1" 1/2	169
4040	B	102	146,0	35	50 - 55 - 60 - 65 - 70 - 75 - 80 - 85 - 90 - 95	5/8" x 1" 3/4	169
4545	B	115	162,0	35	65 - 70 - 75 - 80 - 85 - 90 - 95 - 100 - 110	3/4" x 2"	192
5050	B	127	177,6	50	70 - 75 - 80 - 85 - 90 - 95 - 100 - 110 - 120 - 125	7/8" x 2" 1/4	272